

Radiometric aerial thermography



Features:

- Full radiometric IR inspection with up to 640x480 pixels
- 380 g two-piece design: independent additional use of the IR camera with any Windows PC or tablet PC
- Real-time radiometric onboard recordings to USB 3.0 flash drive (32 Hz / VGA or 125 Hz / VGA sub-frame mode)
- GPS and GoPro support
- Extensive analysis software PI Connect included
- Remote recording control and switching between VIS / IR live video
- Cost-free field updates of the Recording Box software


Specifications optris PI camera head

Measuring range	-20 °C ... 900 °C
Spectral range	7.5 – 13 µm
Accuracy	± 2 % or ± 2 °C
Thermal sensitivity (NETD)	40/ 80 mK (depending on camera model)
Optics	13°... 90° HFOV
Resolution	640x480 px / 382x288 px
Dimensions	46 x 56 x 90 mm
Operating temperature	0...50/ 70 °C (PI 450)

Specifications LightWeight Recording Box

Power supply	10-48 V DC
Power consumption	12 W
Cooling	Active (integrated fan)
Operating temperature	0 ... 50 °C
Relative humidity	10-95%/ non-condensing
Dimensions	96 x 67 x 47 mm
Weight	380 g (PI camera + Recording Box)
Material (housing)	Aluminum
Module	Odroid XU4
Processor	Samsung Exynos/ 2 GHz
Operating system	Linux
Memory	16 GB eMMC, 2 GB RAM (LPDDR3), SDHC card (16 GB), USB 3.0 flash drive (128 GB)
Connections	Ethernet (GigE/ 1000 Mbit/ s), 2x USB 3.0/ 1x USB 2.0, 1x Mini-USB for GoPro Hero3+ (or better), 1x HDMI, 1x TV _{out} , 2x JR connectors
Terminals	+5V DC out, Video IN (VIS camera), TVout, 2x external switches
Control (via JR connectors or terminal)	Start/ Stop recording, Switch VIS/ IR camera
Additional features	GPS support, 5 status LEDs

Recommended system integration

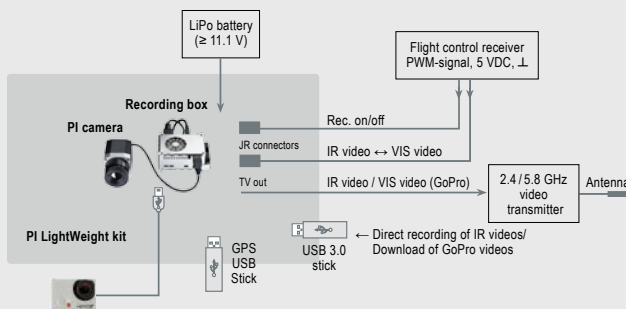


Possible extension with GoPro Hero camera, GPS USB flash drive and 2.4 GHz flight control receiver

Applications



The optris PI LightWeight is excellent for maintenance work and quality inspections through radiometric temperature measurement of solar and wind power systems and also for thermographic surveys of buildings.

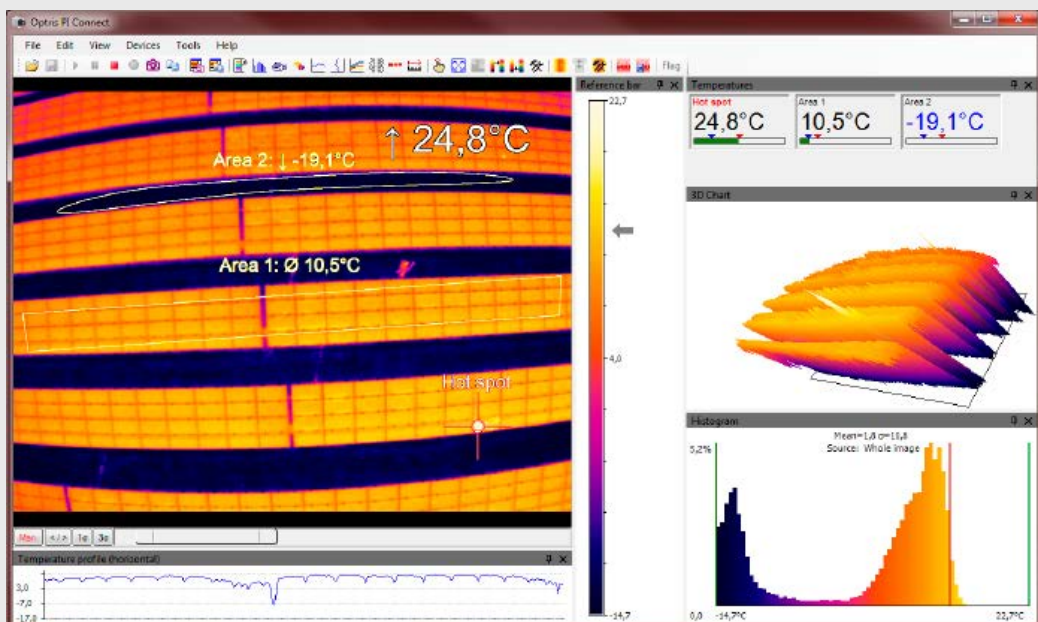

Screenshot analysis software optris PI Connect